

# Front-Opening Counter P 7097

## Front-Opening Counter P 7097

This unit was designed for the flush built-in into the front or partition walls.  
It is for in- as well as for outdoor use in porters' lodges, prisons, embassies and customs offices.

### Security

P 7097 is available in bulletproof classification FB4 up to FB 7 as well as in fire-resistant execution. On request we send you the respective test certificate.

### Operation

The unit is operated manually. Only after closing the inner cover plate, the carriage can be moved to the outside. It locks in both end positions.

Tray and inner cover plate are interlocked which guarantees the bullet-resistance and at the same time prevents from unauthorized grasping in and draught at the workplace.


### Construction and finish

Solid, lacquered steel construction. Front cover, inner cover plate as well as draught slide are from aluminium, silver anodized as standard version.

### Installation


From the outside, the unit is inserted into the prepared wall-opening. From above the inner cover plate of the counter is set into the cut-out of the desk and bolt together with the unit. In any case, the unit needs to be appropriately supported to make sure that the counter does not bear the whole weight.

It should be also possible to dismantle the unit in case of later repairs and maintenance work will become necessary.

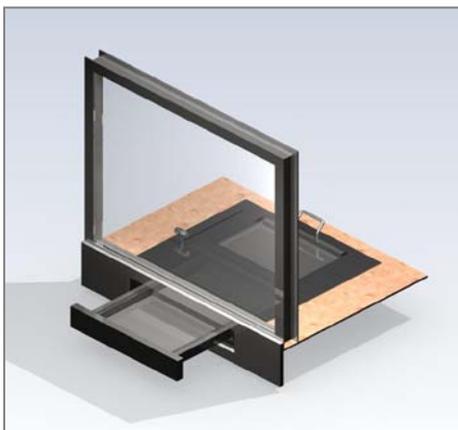

### Intercommunication system

We recommend our Intercom System Delta to allow customer-friendly communication between operator and customer.

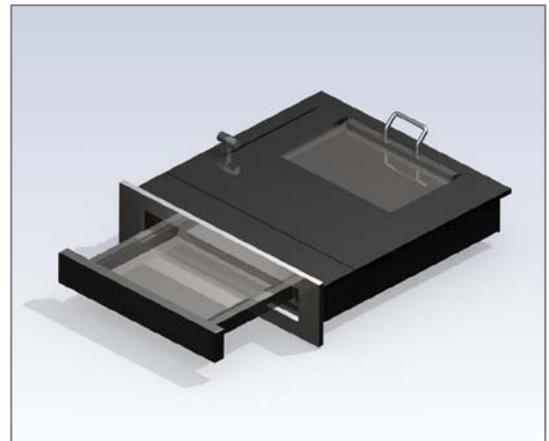

### Scope of delivery

Front-Opening Counter P 7097-FB4 (Item No: 100556)  
Front-Opening Counter P 7097-FB6 (Item No. 100561)  
Front-Opening Counter P 7097-FB7 (Item No. 100563)

### Possible variants

P 7097/Delta, with integrated intercom system  
P 7097/O, for pass-through of large files  
size: DIN A 4  
P 7097/F120, fire-resistant acc. to DIN 4102

as well as special constructions, e.g. for thicker walls, with different dimensions of the blind, special colors (RAL), stainless steel finish, etc.

Please contact us.

**Security** (Bulletproof according to DIN EN 1522): FB4-NS or FB6-NS or FB7-NS  
For Item Nos. pls. refer to scope of delivery (all also acc. to BGV C9 - UVV Kassen)

### Wall opening:

W x H = 605 x 130 mm  
Strength of wall above max. 250 mm

### Front cover :


L = 630 mm, H = 165 mm

### Inner clearance:

W x H x D = 330 x 30 x 235 mm

### Required information for order:

Name, bullet-resistance class and Item No.  
(Our recommendation: Intercom System Delta)

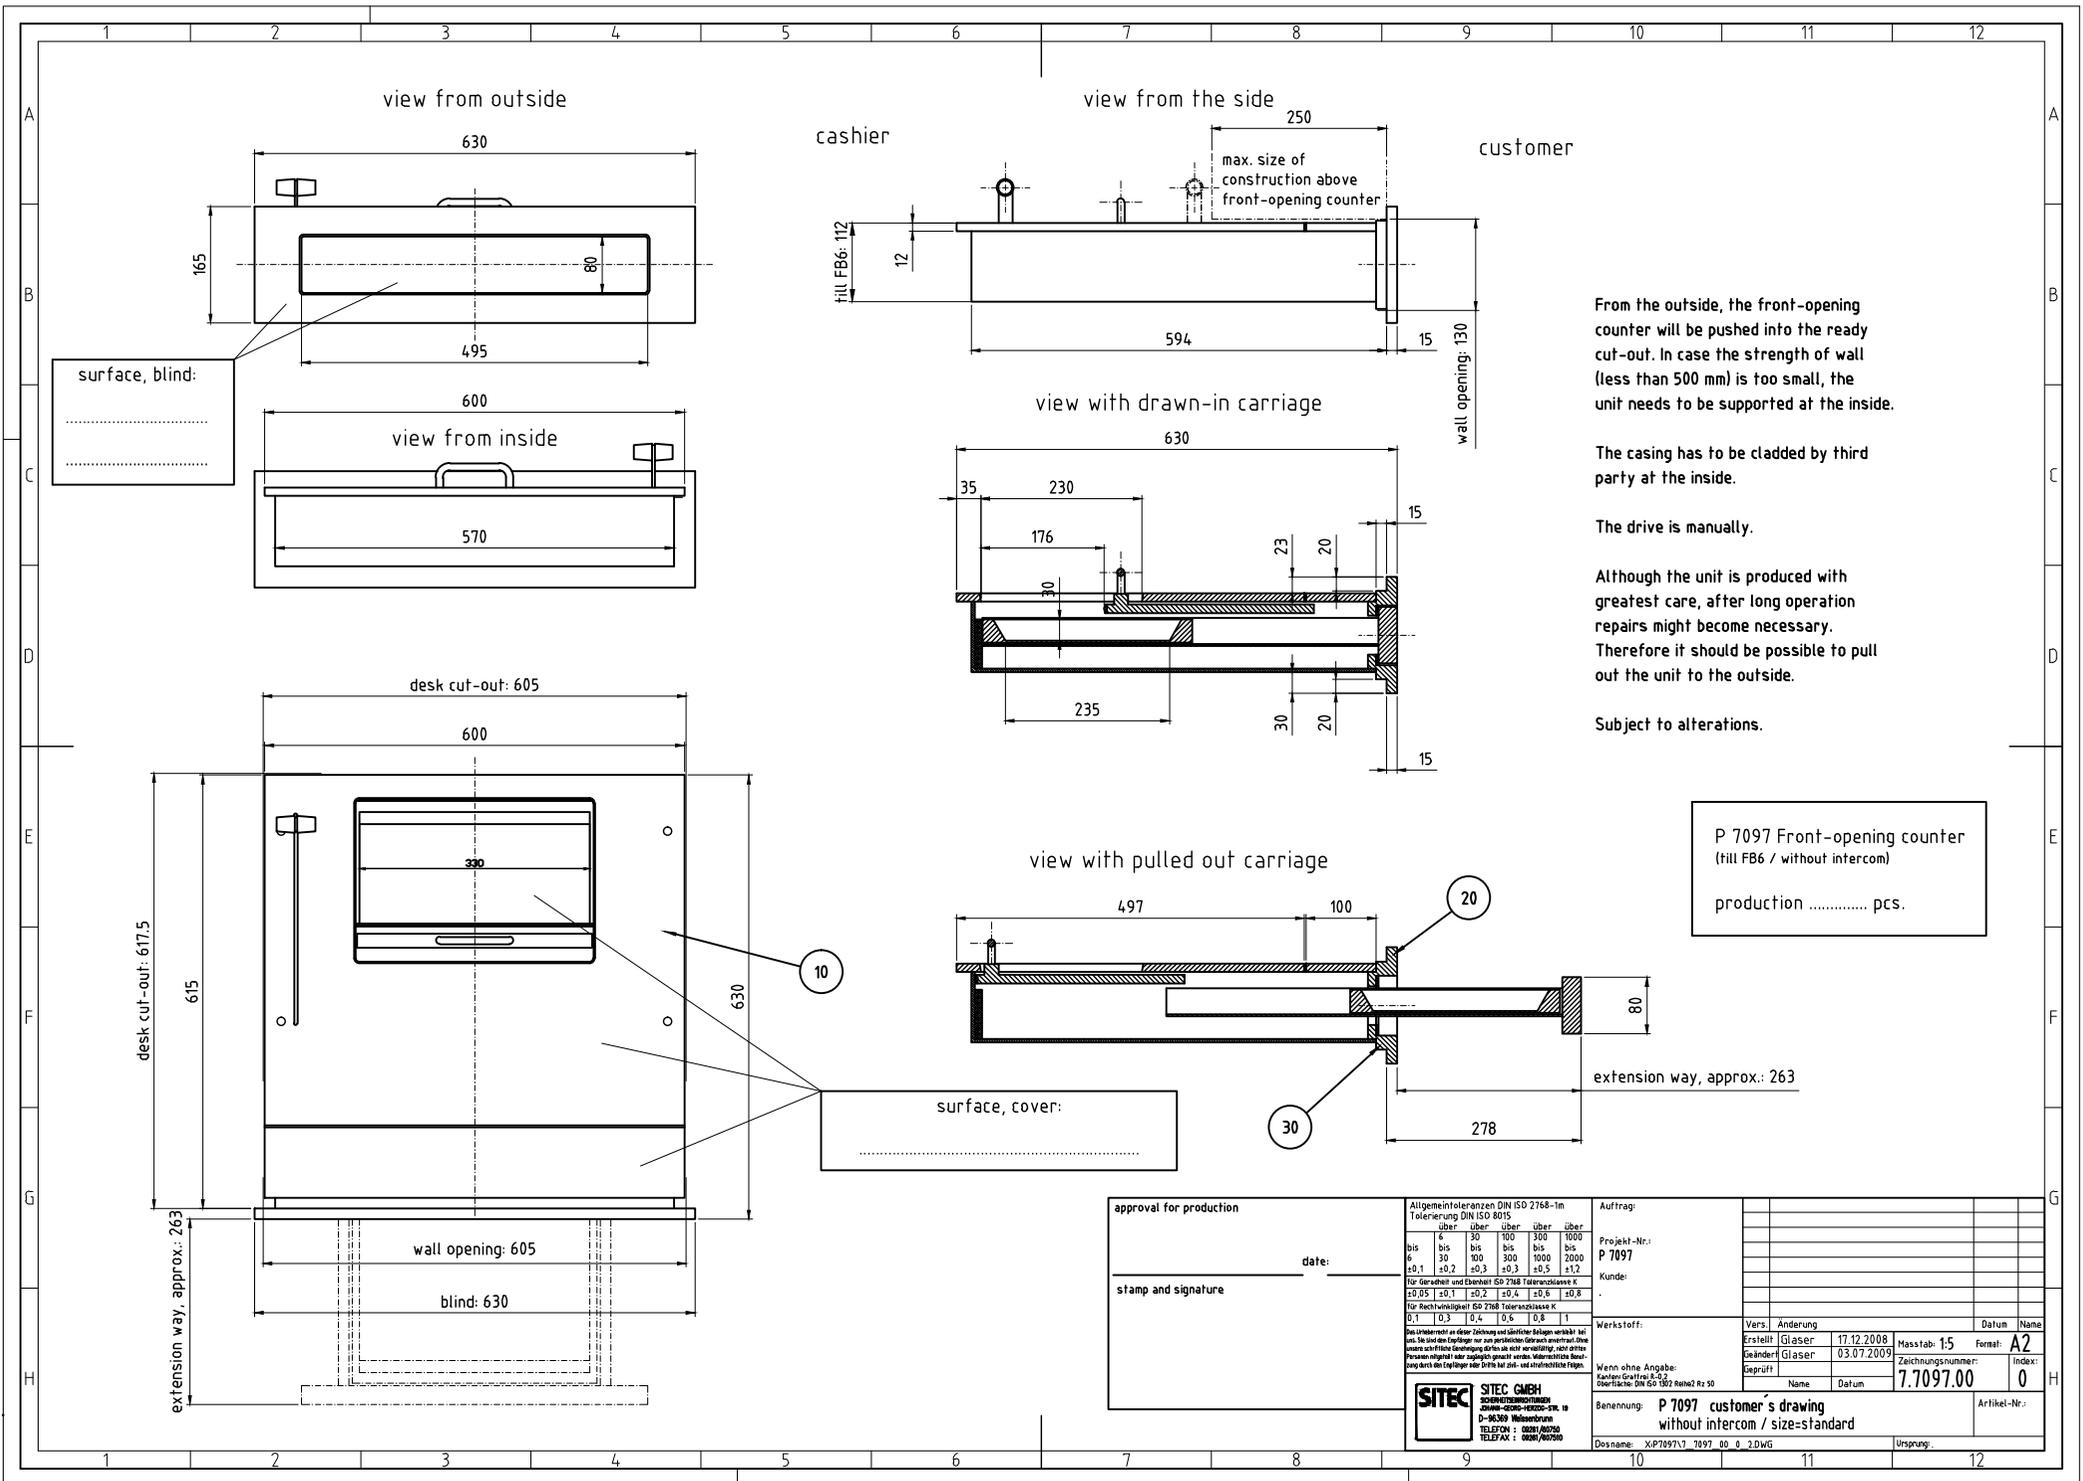

From the outside, the front-opening counter will be pushed into the ready cut-out. In case the strength of wall (less than 500 mm) is too small, the unit needs to be supported at the inside.

The casing has to be clad by third party at the inside.

The drive is manually.

Although the unit is produced with greatest care, after long operation repairs might become necessary. Therefore it should be possible to pull out the unit to the outside.

Subject to alterations.

P 7097 Front-opening counter  
(fill FB6 / without intercom)  
production ..... pcs.

approval for production	Allgemeintoleranzen DIN ISO 2768-1m Tolerierung DIN ISO 8015		Auftrag:	
	über bis	über bis	über bis	über bis
date:	6 ±0,1	30 ±0,2	100 ±0,3	300 ±0,5
stamp and signature	Für Genauigkeit und Ebenheit ISO 2768 Toleranzklasse K ±0,05   ±0,1   ±0,2   ±0,4   ±0,6   ±0,8		Projekt-Nr.: P 7097	
	Für Nachvollziehbarkeit ISO 2768 Toleranzklasse M 0,1   0,3   0,4   0,6   0,8   1		Kunde:	
Das Unternehmen an dieser Zeichnung und sämtlicher Anlagen verbleibt bei uns. Sie sind dem Empfänger nur zum persönlichen Gebrauch anvertraut. Ohne unsere schriftliche Genehmigung dürfen sie nicht ververvielfältigt, nicht Dritten zugänglich gemacht oder sonstwie genutzt werden. Näheres hierzu lesen Sie bitte in den Lieferbedingungen. © 2009 SITEM GmbH		Werkstoff:		
SITEM GMBH SCHREIBENSTRASSE 40466-2020 HERTZ-STR. 18 D-46309 Melle/Hoerdt TELEFON : 05071 90200 TELEFAX : 05071 902010		Vers. Änderung		
		Erstellt: G. Glaser 17.12.2008		
		Geändert: G. Glaser 03.07.2009		
		Massstab: 1:5		
		Formal: A2		
		Zeichnungsnummer: 7.7097.00		
		Index: 0		
		Benennung: P 7097 customer's drawing		
		without intercom / size-standard		
		Arbeits-Nr.:		
		Desname: XP7097V7_7097_00_0_2.DWG		
		Ursprung:		